

Conditions for the optimality of the criterion programming problem and determination of basic parameters of community power generation

Milan Belik¹, Oleksandr Rubanenko²

¹ Department of Power engineering,
University of West Bohemia
Univerzitni 8, 30614 Plzen (Czech Republic)
Phone/Fax number: +420 377 634 315

² Department of electric station and system,
95 Khmelnytske shose, 21021, Vinnytsia, Ukraine
Phone/Fax number: +380 748 02 85

Abstract. The paper presents the application of the criterion programming problem and determination of its basic parameters to predict the behavior of an energy community in Ukraine during the war and post war restructure process.

The main problem of the criterion programming is the implementation of renewable energy sources – especially grid-on photovoltaic hybrid system. The theoretical method starts from the basic equation of the criterion programming problem. The model is then developed with continuous indexing resulting to orthonormal equations. Next, the convexity of the function is analyzed and system of nonlinear equations is generated.

The basic criteria is calculated what results in definition of remaining similarity criteria. Next, normalization and residual vectors are calculated allowing the definition of the optimal values. If the similarity criteria is optimal, the substitution in the equation leads to final result.

Proposed method was verified on model situation of specific community in Ukraine. The calculations were made in PV*SOL Premium as described in the last part of the paper.

This mathematical model can be practically used to analyze the energy needs of a community in emergency situation and to define the optimal energy covering of it needs. Particularly, it can be used in war and post war conditions in Ukraine to enhance the conditions in damaged and overloaded energy grid and to improve the energy resilience.

Key words. Energy community, renewable energy sources, photovoltaic system, criterion optimization, objective function.

1. Introduction

When the Russian aggression attack started against Ukraine, unpredictable challenges to the country's security and economy, but also to its environmental protection, power engineering, green energy and sustainable and low-carbon development [1, 2] started. The energy security of Ukrainians is severely threatened for more than 2 years. Approximately 50 % of Ukraine's energy infrastructure has been destroyed or temporarily occupied. One of the possible solutions how to improve the situation is implementation of communal power engineering [3, 4].

But in Ukraine, there is still no clear simple and efficient system for the establishment, organization and operation of an energy community. Government and non-government organizations (such as Synergy, Ecoclub, etc.) are already dealing with this problem and the first projects will be realized soon [4, 5, 6]. But many problems must be solved for efficient renewable energy source implementation in community energy in these specific conditions [7, 8, 9].

Mathematical models describing the structure of energy community and RES (photovoltaic system) operation requires to define the conditions for optimization [10, 11]. These conditions must respect specific features, exactly technical, metrological, economic, legislative and social [12, 13, 14]. The paper describes features of mathematical model using common criterion optimality [15].

2. Conditions for the optimality of the criterion programming problem and determination of basic parameters

Criterion programming (CP) as an optimization method and as an integral part of similarity theory is designed to study optimization processes in complex dynamical systems. Within the limits of real technical possibilities, the method of optimal control finds limit conditions of these systems. The method further develops the fastest direction and obtains general optimality conditions in the form of stable patterns. The relationships between optimal values of objects and phenomena is than created for appropriate automatic control systems. Therefore it is important to study the conditions for determining the optimal similarity criteria. In the CP task are not only certain dimensionless combinations of parameters from the theory of similarity, but also variable patterns of the dual optimization task [16, 17].

The relationship between the similarity criteria can be investigates from the conditions of optimality, but not directly from the numerical values of the similarity criteria. In this sense, these relations are quasi-conditions and they can serve as the basis for the development of algorithm calculating the optimal values of similarity criteria.

If the conditions for the optimality of the CP problem are obtained, the direct problem of CP can be formulated as following equations (1) and (2).

The minimal value of similarity criteria is defined:

$$y(x) = \sum_{i=1}^{m_1} a_i \cdot \prod_{j=1}^n x_j^{\alpha_{ji}} \quad (1)$$

under conditions

$$g_k(x) = \sum_{i=m_k+1}^{m_{k+1}} a_i \prod_{j=1}^n x_j^{\alpha_{ji}} \leq G_k, \quad k = \overline{1, p}, \quad (2)$$

where $y(x)$ is the criterion of optimality; a_i are constant coefficients; x_j are variable parameters; G_k are numerical values of the limits $g_k(x)$, which determine the allowable area of existence of the optimality criterion.

The continuous indexing of components of objective functions in expressions (1) - (2) is accepted for more simple definition of restrictions. The definition is m_1 for the number of members in the objective function and only generalized in the form (3).

$$m = m_1 + \sum_{k=1}^p m_k \quad (3)$$

Equation (4) defines mathematical model of components, where m_k is the number of members in the k constraint. The corresponding calculations show the dual problem of criterion programming.

The maximum can be calculated (4):

$$d(\pi) = \prod_{i=1}^m \left(\frac{a_i}{\pi_i} \right)^{\pi_i} \prod_{k=1}^p \left(\frac{\lambda_k}{G_k} \right)^{\lambda_k} \quad (4)$$

from the condition of orthogonality (5):

$$\sum_{i=1}^m \alpha_{si} \pi_i = 0, \quad s = \overline{1, n}, \quad (5)$$

and the condition of ratio (6):

$$\sum_{i=1}^{m_1} \pi_i = 1, \quad (6)$$

where π_i is the similarity criteria and λ_k are normalized Lagrange multipliers (7).

$$\lambda_k = \sum_{i=m_k+1}^{m_{k+1}} \pi_i \quad (7)$$

It shows that the similarity criteria in the space described by the system of orthonormal equations are determined by equation (8):

$$\pi = \beta_{oi} + \sum_{j=1}^s \beta_{ji} \cdot \pi_j \quad (8)$$

where β_{oi} is the normalization vector; β_{ji} is the residual vector; π_j is basic similarity criteria and $s=m-n-1$ is the complexity of the criterion programming task.

Fig. 1 shows an example of the similarity criteria dependence on the problem of CP with $s = 1$. The end of the vector π always lies on the line 1-1 and determines such values of similarity criteria that satisfy the conditions (4) - (5). One of the positions of the vector π (it is shown on Fig. 1) gives such values of similarity criteria that provide the maximum value of the dual function (3) and the minimum value of the function (1). Actually, the problem of CP is to find such a position of the vector π in space, which is determined by practical conditions.

If express the similarity criteria through the basic criteria and vectors of normalization and residuals. The dual function will be rewritten as follows (9):

$$d(\pi_j) = \prod_{i=1}^m \left(\frac{a_i}{\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j} \right)^{\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j} \times \prod_{k=1}^p \left(\sum_{i \in T_k} \left(\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) \right) \quad (9)$$

where T_k is a set consisting of the indices defining members of the k constraint.

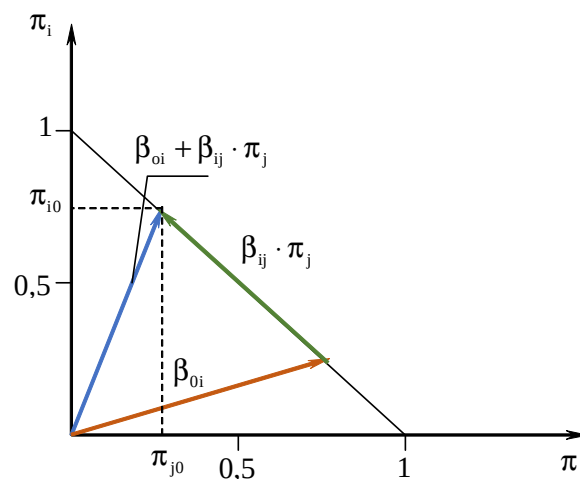


Fig 1.: Dependence of similarity criteria.

The task is considered where the function $d(\pi)$ is convex. It is always possible to replace the definition $d(\pi)_{\max}$ with the definition of a stationary point of the function, because the sets of maximal points of these functions coincide. The logarithm transformation is shown in the expression (10).

$$\ln d(\pi_j) = \ln \prod_{i=1}^m a_i^{\beta_{i0}} + \sum_{i=1}^m \pi_j \ln \prod_{i=1}^m a_i^{\beta_{ij}} - \sum_{i=1}^m \left(\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) \times \ln \left(\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) + \sum_{k=1}^p \sum_{i \in T_k} \left(\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) \cdot \ln \left(\beta_{i0} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) \quad (10)$$

Take the derivative of the function $\ln d(\pi_j)$ according to the basic similarity criteria π_j and equate them to zero. A system of equations is obtained from which the conditions of the maximum of the function $d(\pi_j)$ can be calculated from the expression (11):

$$\frac{\prod_{i=1}^m \left(\beta_{io} + \sum_{j=1}^s \beta_{ij} \pi_j \right)^{\beta_{ij}}}{\prod_{k=1}^p \left[\sum_{i \in T_k} \left(\beta_{io} + \sum_{j=1}^s \beta_{ij} \pi_j \right) \right]^{\sum_{i \in T_k} \beta_{ik}}} = \prod_{i=1}^m a_i^{\beta_{ij}} \quad (11)$$

The system in general nonlinear equations s is obtained. It determines the conditions for the optimality of the problem CP. Solving it with respect to the basic variables π_j allows us to determine the maximization vector π_o , and hence the maximum of the dual function $d(\pi)_{\max}$.

Note that the similarity criterias, which by definition are some relations of parameters, according to conditions (7) are determined without defining the variables of the direct problem CP x_j . It means that the criterion model of the process, in which the found criteria of similarity π_o are used, establishes a complete mathematical analogy, which is invariably preserved for all possible values of variables x_j that satisfy conditions (2).

Than it can be argued that (7) are quasi-conditions for the optimality of the CP problem, which do not directly give an optimal solution, but they can be easily used to construct practical algorithms for finding the optimal solutions. The method is shown and explained in following paragraphs.

When forming a system of optimality conditions (7), the problem of allocating basic similarity criteria π_j arises. The composition of the basic similarity criteria is often determined by the characteristics of the process under study and in the function of which the optimal control is carried out. If such considerations do not exist, then formally this problem is solved by choosing from a set of similarity criteria for which the corresponding normalization vectors are equal one to each other and the residual vectors are zero.

Having determined the system of basic criteria, the remaining similarity criteria can be determined according to (11) using normalization vectors β_o and residuals β_j . In order to obtain the vectors β_o and β_j , the properties of the linear space are used. They can be described by a matrix of exponents α , to equivalent transformations. Convert the matrix of α according to the Gauss-Jordan algorithm to the form (12).

$$\alpha' = \left[\begin{array}{cccc|cccc} 1 & 0 & \dots & 0 & \alpha'_{1,n+1} & \alpha'_{1,n+2} & \dots & \alpha'_{1,m} \\ 0 & 1 & \dots & 0 & \alpha'_{2,n+1} & \alpha'_{2,n+2} & \dots & \alpha'_{2,m} \\ \dots & \dots & \dots & \dots & \dots & \dots & \dots & \dots \\ 0 & 0 & \dots & 1 & \alpha'_{n,n+1} & \alpha'_{n,n+2} & \dots & \alpha'_{n,m} \end{array} \right] \quad (12)$$

Normalization vectors can be obtained from any column vector of the matrix β' . To do this, the selected vector-column β_i must be divided by the sum of its first m_1 components. As a result, the following vector (13) is obtained:

$$\beta_o = \frac{1}{\sum_{j=1}^{m_1} \beta_{ji}} \cdot \beta'_i \quad (13)$$

This satisfies both the condition of orthogonality resulting from the construction of the matrix β and the condition of normalization, since all components of the vector β_i are divisible by the sum of its first m_1 components.

To obtain the residual vector j , it is necessary to subtract from the j vector-column of the matrix β' the product of the sum of the first m_1 of its components on the vector of normalization β_o . It gives the residual vectors (14):

$$\beta_j = \beta'_j - \left(\sum_{l=1}^{m_1} \beta_{li} \right) \cdot \beta_o, \quad j \in \{1, 2, \dots, s+1\}, j \neq i \quad (14)$$

In order to determine the optimal values of the similarity criteria from the set of their allowable values, the equation (7) is

converted by dividing both its parts by $\prod_{i=1}^m a_i^{\beta_{ij}}$ to get the following (15):

$$\nabla d(\pi_j) = \frac{\prod_{i=1}^m \left(\beta_{io} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right)^{\beta_{ij}}}{\prod_{i=1}^m a_i^{\beta_{ij}}} \cdot \frac{1}{\prod_{k=1}^p \left(\sum_{i \in T_k} \left(\beta_{io} + \sum_{j=1}^s \beta_{ij} \cdot \pi_j \right) \right)^{\sum_{i \in T_k} \beta_{ik}}} = 1 \quad (15)$$

If the similarity criteria is optimal then after substituting them in (15), the equation is equal to the value one. The iterative process of searching the optimum values of criteria similarity has structural and logical scheme presented on Fig. 2. Giving the first approximation of the similarity criteria, this may be the arithmetic mean between the respective vectors of normalization.

The values $\nabla d(\pi_j)^{(0)}$ are calculated and the composition of the basic similarity criteria is selected so that all s values $\nabla d(\pi_j)^{(0)}$ are smaller than 1. This provides the necessary conditions for the convergence of the iterative process.

In the next step, the values of the basic similarity criteria π_j are specified, reducing their values by $\nabla d(\pi_j)$. Then the new values are calculated for that. Since these values π_j are greater than 1, the values for subsequent iterations are calculated as the arithmetic mean between the corresponding basic similarity criteria of the previous iterations.

In subsequent iterations, the value $\nabla d(\pi_j)$ serves as a guiding factor and determines the direction of movement to the optimal values of the similarity criteria.

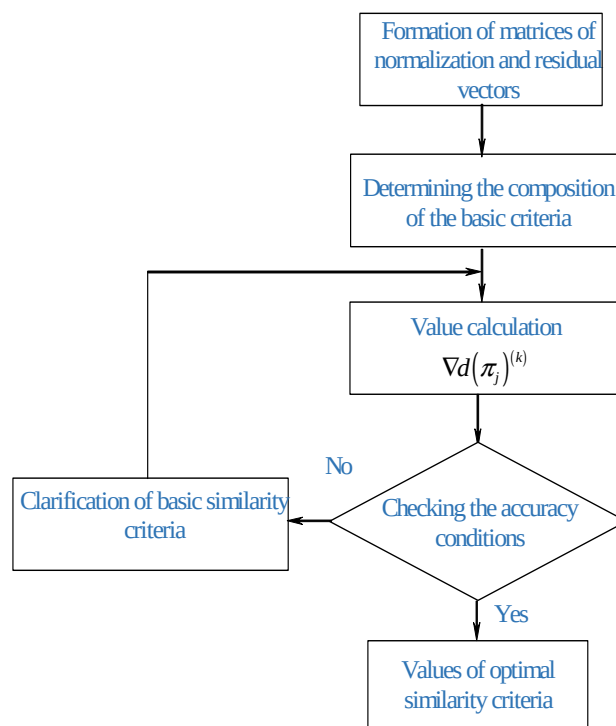


Fig 2.: Structural and logical scheme of the algorithm for determining the similarity criteria

The iterative process is terminated if the following conditions in equation (16) are met:

$$|\nabla d(\pi_j^k) - 1| \leq \varepsilon_1 \quad (16)$$

The coefficients ε_2 must meet the condition formed in equation (17):

$$\left| \frac{d(\pi^k) - d(\pi^{k-1})}{d(\pi^{k-1})} \right| \leq \varepsilon_2 \quad (17)$$

where ε_1 , ε_2 are given from the measure of the accuracy required for the calculations.

3. Model verification on community photovoltaic power plant energy supply

The proposed criterion model was tested on simulated power generation covering the energy needs of Ukrainian community in small town with historical center and communal sporting facilities. The real location cannot be described because of strategic reasons during the war time.

Sample simulation using the photovoltaic system installed on the roof of the communal sporting hall is presented on the Fig. 3. The design of PV system respects the fire safety requirements, lightning protection rules (safe distance) and maximizes the generated energy on available surfaces not affected by shadowing (green areas on the simulation result).

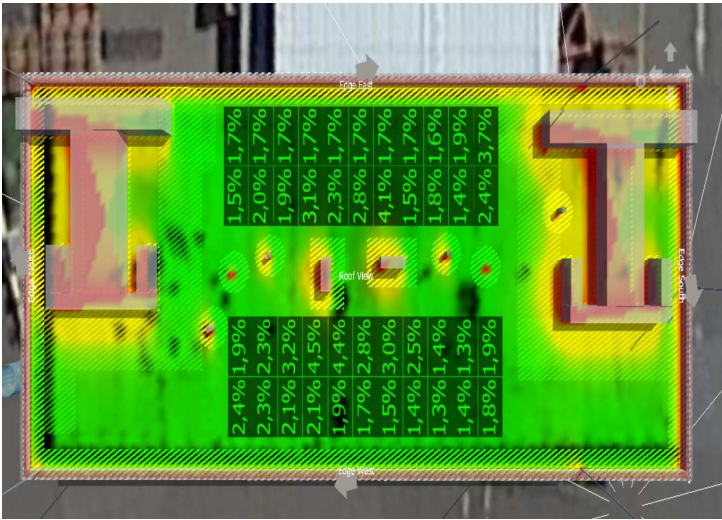


Fig 3.: Simulation on the model of the communal sporting facility (PV*SOL Premium).

Fig. 4. presents 1 sample of typical load profiles used for simulations. It is basic load chart describing annual behavior of family living in separate low energy property (shelter) with annual consumption 3012 kWh. Group of similar profiles is used for simulation of the community consumption.

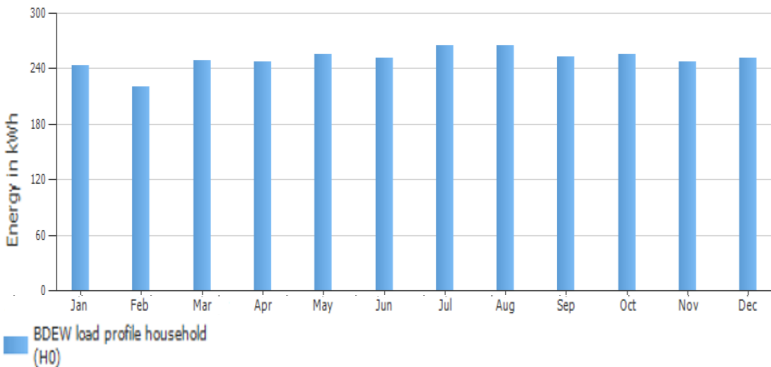


Fig 4.: Sample load profile with annual consumption 3012 kWh (PV*SOL Premium).

Fig. 5 demonstrates the simulated power generation in the model community before applying the method and reaching the optimal similarity criteria according to equations (10) and (11). The blue peaks mean the overproduction not used in the community and injected to the main grid. Optimization of this energy is the task for the criterion programming.

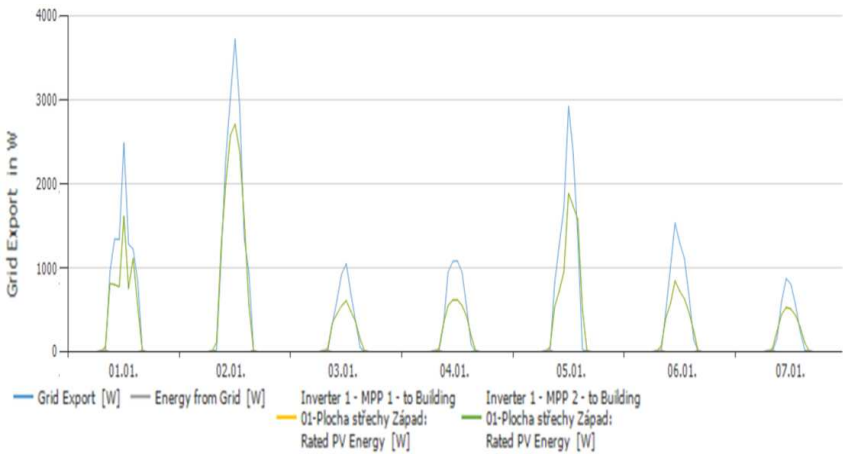


Fig 5.: Power generation before reaching the optimal values of the similarity criteria (PV*SOL Premium).

Table I shows average power generation and the amount of underproduction. This energy covering the load chart could be used from storage (for example in high temperature battery), can cover charging electric vehicles (with or without WTG technology [18] or could be decrease using the optimization (6), (7) and (8). For purposes of this paper we expect the optimization to reach the decrease of PV system size and thus economic benefits, respectively the lower purchasing costs for better realization of the system in the war time. From this reason, the second hand modules produced 7 – 8 ago available from closed and decommissioned projects are used for simulations [19]. These panels are very often offered for reasonable prices for Ukrainian marked from Germany and still can offer acceptable parameters [20].

Table I: Power production and load coverage before optimization of the photovoltaic system.

	Load	PV system	Grid	month	annual
	kWh	kWh	kWh	[%]	[%]
Jan	2216,4	124,4	2092,8	5,612705	1,24397512
Feb	1727,4	208,3	1519,8	12,05859	2,08295834
Mar	1240,1	227,1	1013,7	18,31304	2,27095458
Apr	614,8	195,5	419,8	31,79896	1,9549609
May	189,1	83,3	106,4	44,05077	0,83298334
Jun	0	0	0,4	0	0
Jul	0	0	0,5	0	0
Apr	12,7	5,9	7,4	46,45669	0,05899882
Sep	197,9	79,6	118,8	40,22233	0,79598408
Oct	572,5	151,9	421,3	26,53275	1,51896962
Nov	1275,6	125	1151,4	9,79931	1,249975
Dec	1953,7	108	1846,6	5,527973	1,0799784
sum	10000,2	1309	8698,9		13,0897382

Fig. 6 presents situation for model Variant 1 after the optimization process. The gray columns have the same structure like on Fig. 4, while the second aggregated columns mean the summary of coverage from own communal photovoltaic plant, external grid and battery storage.

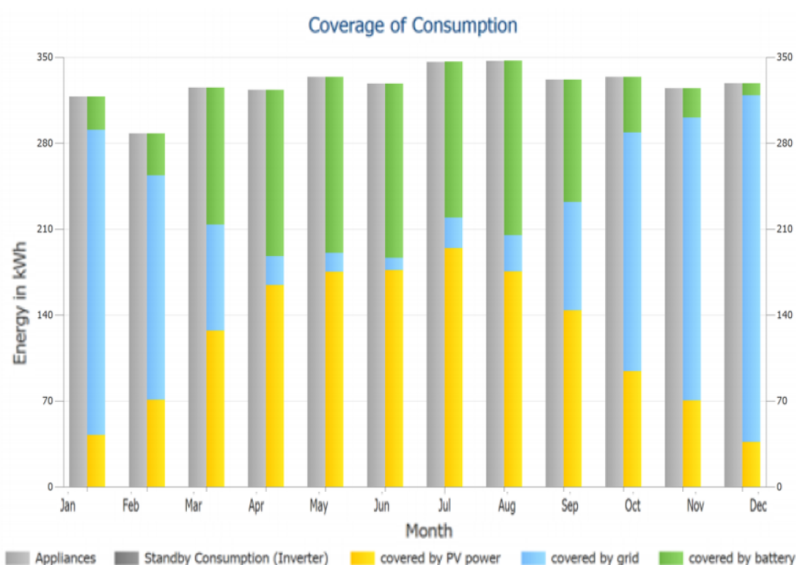


Fig 6.: Covering the energy needs after the optimization – Variant 1 (PV*SOL Premium).

3 other variants were simulated with similar results. Every variant was calculated with photovoltaic array oriented to south with inclination 35° and with dual system east / west with inclination 15°.

Table II shows 4 variants of the same situation after the optimization process. The similarity vectors describing the power generation, power production and power consumption in equations (1) and (2) are recalculated according to the flow chart on Fig. 2.

It is evident that the difference between original annual sum of energy flow compared to optimized variants is between 1000 – 2000 kWh what means difference between 15 – 20 %. Although it could be expected that east / west system should give better results, in this case the south oriented system is more profitable. The reason is rather specific load chart for the refugees shelters included in the energy community.

Table II: Optimization process (4 variants).

	Variant 1		Variant 2		Variant 3		Variant 4	
	<u>south</u>	e/w	<u>south</u>	e/w	<u>south</u>	e/w	<u>south</u>	e/w
	kWh	kWh	kWh	kWh	kWh	kWh	kWh	kWh
Jan	331,8	108,6	367,5	123,1	362,8	126,2	432,7	126,2
<u>Feb</u>	439,9	235,6	537,7	281,6	542,3	282,8	564,4	283,7
<u>Mar</u>	778,6	519,8	890,3	611,1	915,6	610,4	872,9	583,7
<u>Apr</u>	983,4	810,7	1037,6	857,7	1047,8	864,2	1049,3	855,7
May	1130,1	1046,5	1130,9	1084,4	1140,8	1086,3	1128,9	1052,7
Jun	1113,8	1087,3	1141,4	1122,2	1159,3	1141,4	1118,4	1110,1
Jul	1129,4	1081,8	1161,4	1110,3	1166	1171,4	1144,4	1137,6
<u>Apr</u>	1085,3	940,4	1133,4	982	1136,1	989,1	1095,3	945,6
<u>Sep</u>	829,4	610,8	852,8	647,3	869,6	652,4	872,5	637,9
<u>Oct</u>	573	327,9	587,8	359,5	641,9	367,7	639,4	364,1
Nov	293,1	103,3	325,2	122,2	321,3	133,5	404,2	142,5
Dec	209	52,1	257,5	72,2	274,6	71,5	285,8	66,3
sum	8896,8	6924,8	9423,5	7373,6	9578,1	7496,9	9608,2	7306,1
optim.	6860,7	5782,68	7142,04	6097,05	7269,39	6194,61	7128,99	6018,66

4. Results and conclusions

The simulations summarized in Table II show that interesting results can be expected after usage of criterion programming for optimization of energy flows inside the energy community. The algorithm was applied on specific energy community situated in Ukraine and containing also emergency shelters for war refugees. These objects have rather specific features and load chart because they are designed with view on secondary applications after the war for another communal purposes, sporting or cultural events.

Beside contribution to evolution of energy communities, can be this approach very useful for Ukrainian power engineering during the war emergency operation what shows the immediate useful application of this research.

Acknowledgement

This paper was supported by projects 24-PKV-V-UM-006, 24-PKV-V-UM-007 and MSCA4U 1233365.

References

- [1] Z. Zhu, X. Wang, X. Wu, J. He, X. Chen and Y. Wang, "Energy storage planning for a rooftop PV system considering energy sharing," in CSEE Journal of Power and Energy Systems, doi: 10.17775/CSEEJPES.2022.04670.
- [2] Lakshmi, G.S., Rubanenko, O., Hunko, I. "Control of the Sectioned Electrical Network Modes with Renewable Energy Sources," 2021 International Conference on Sustainable Energy and Future Electric Transportation, SeFet 2021, 2021, 9375781.
- [3] J. Lu, W. Zheng, Z. Yu, Z. Xu, H. Jiang and M. Zeng, "Optimizing Grid-Connected Multi-Microgrid Systems With Shared Energy Storage for Enhanced Local Energy Consumption," in IEEE Access, vol. 12, pp. 13663-13677, 2024, doi: 10.1109/ACCESS.2024.3351855.
- [4] "Civil Society Energy for Resilient Ukraine" <https://citizenenergy.com.ua/en/about-project-civil-society-energy-resilient-ukraine>
- [5] Belik M. "Optimisation of energy accumulation for renewable energy sources," 2021 Renewable Energy and Power Quality Journal, 19, art. no. 258, pp. 205 - 210, DOI: 10.24084/repqj19.258.
- [6] Rubanenko, O., Kazmiruk, O., Bandura, V., Matvijchuk, V., Rubanenko, O., "Determination of optimal transformation ratios of power system transformers in conditions of incomplete information regarding the values of diagnostic parameters," Eastern-European Journal of Enterprise Technologies, 2017, 4(3-88), pp. 66–79.
- [7] Belik, M., Rubanenko, O., "Degradation of Monocrystalline PV Panels Differences between Ukrainian and Czech Conditions," Proceedings of the 11th International Scientific Symposium on Electrical Power Engineering, ELEKTROENERGETIKA 2022, 2022, pp. 38–42.
- [8] C. Chang, B. Ghaddar and J. Nathwani, "Shared community energy storage allocation and optimization," Applied Energy, vol. 318, pp. 119160, Jul. 2022.
- [9] V. Vostriakova, O. Rubanenko, N. Burennikova, M. Belik and O. Lesko, "Prosuming Business Models in Transition to a Sustainable Bioeconomy," 2023 IEEE 4th KhPI Week on Advanced Technology (KhPIWeek), Kharkiv, Ukraine, 2023, pp. 1-6, doi: 10.1109/KhPIWeek61412.2023.10312899.
- [10] Lakshmi, G.S., Rubanenko, O., Danylchenko, D., Potryvai, A., "A Simulation Model of the Impact of Solar Panel Dust Cover on them Performance," Proceedings - 2021 IEEE International Conference on Intelligent Systems, Smart and Green Technologies, ICISST 2021, 2021, pp. 140–143.
- [11] Belik, M., "Battery storage technology optimisation for Ukrainian War Refugees Emergency Shelters," Renewable energy & power quality journal, 21(1):445-450. doi: 10.24084/repqj21.350.
- [12] Kuchanskyy, V., Rubanenko, O., "Influence assesment of autotransformer remanent flux on resonance overvoltage," UPB Scientific Bulletin, Series C: Electrical Engineering and Computer Science, 2020, 82(3), pp. 233–250.

- [13] Gundebommu, S.L., Rubanenko, O., Cosovic, M., "Determination of Normative Value Power Losses in Distribution power grids with Renewable Energy Sources using Criterion Method" 2020 19th International Symposium INFOTEH-JAHORINA, INFOTEH 2020 - Proceedings, 2020, 9066302
- [14] Belik, M.; Rubanenko, O. Implementation of Digital Twin for Increasing Efficiency of Renewable Energy Sources. *Energies* 2023, 16, 4787, <https://doi.org/10.3390/en16124787>.
- [15] Lezhniuk, P.D., Bevez, S.V., "Optimization method in energy. Criterion method," 1999, Vinnytsia, Ukraine, UNIVERSUM, p. 177.
- [16] Rubanenko, O.O., Komar, V.O., Petrushenko, O.Y., Smailova, S., Imanbekova, U., "Determination of similarity criteria in optimization tasks by means of neuro-fuzzy modelling | Określenie kryteriów podobieństwa w zadaniach optymalizacyjnych za pomocą modelowania rozmytego," *Przegląd Elektrotechniczny*, 2017, 93(3), pp. 93–96.
- [17] P. Lezhniuk, O. Rubanenko, V. Komar and O. Sikorska, "The Sensitivity of the Model of the Process Making the Optimal Decision for Electric Power Systems in Relative Units," 2020 IEEE KhPI Week on Advanced Technology (KhPIWeek), Kharkiv, Ukraine, 2020, pp. 247-252, doi: 10.1109/KhPIWeek51551.2020.9250079.
- [18] Sree Lakshmi, G., Olena, R., Divya, G., Hunko, I., "Electric vehicles integration with renewable energy sources and smart grids," *Lecture Notes in Electrical Engineering*, 2020, 687, pp. 397–411.
- [19] Vanek, J.; Maule, P., "Real-measured Properties of Photovoltaic Modules Manufactured in 2018-2019," In 21st International Conference on Advanced Batteries, Accumulators and Fuel Cells (ABAF 2020). ECS Transaction. 21. USA: ECS – The Electrochemical Society, 2020. s. 203-209. ISSN: 1938-6737.
- [20] Vanek, J.; Maule, P.; Jandova, K.; Langer, F., "Determination of the Best Working Conditions for the Recycling of Solar Modules," In ECS Transaction. ECS Transaction. 1. USA: ECS - The Electrochemical Society, 2021. s. 281-289. ISSN: 1938-6737.